
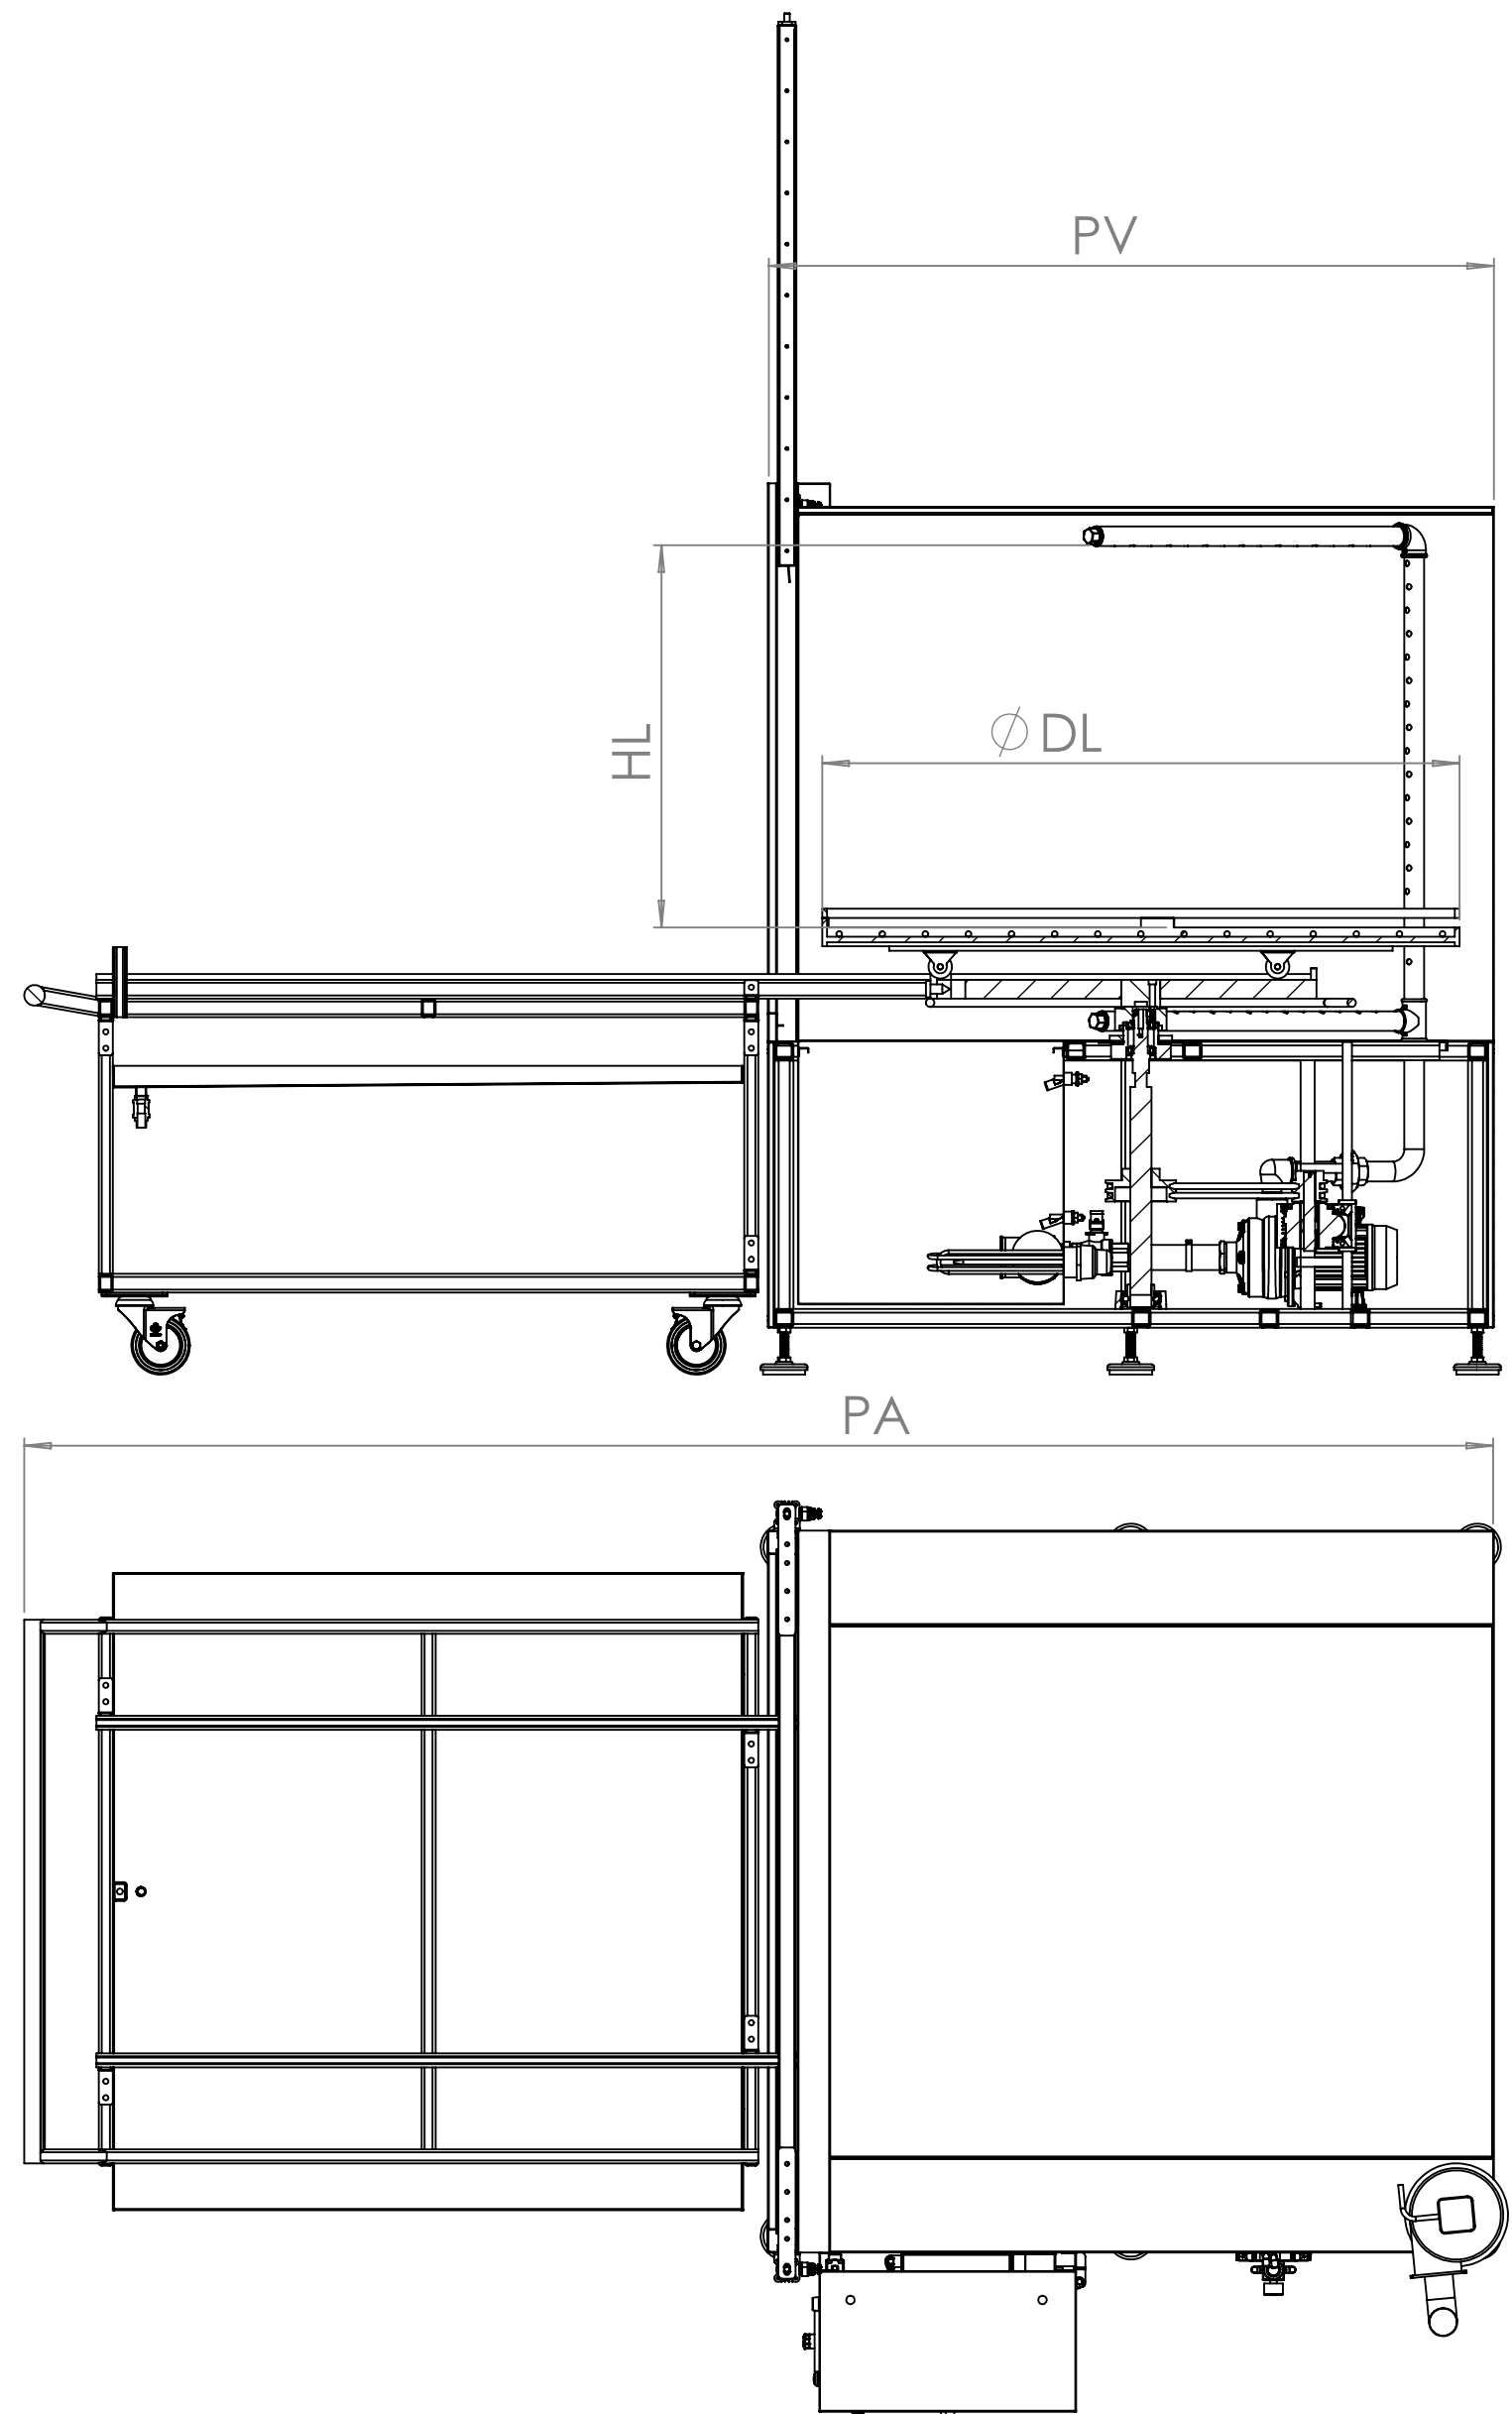


TR DEPOT® FRONTLOADER SERIES

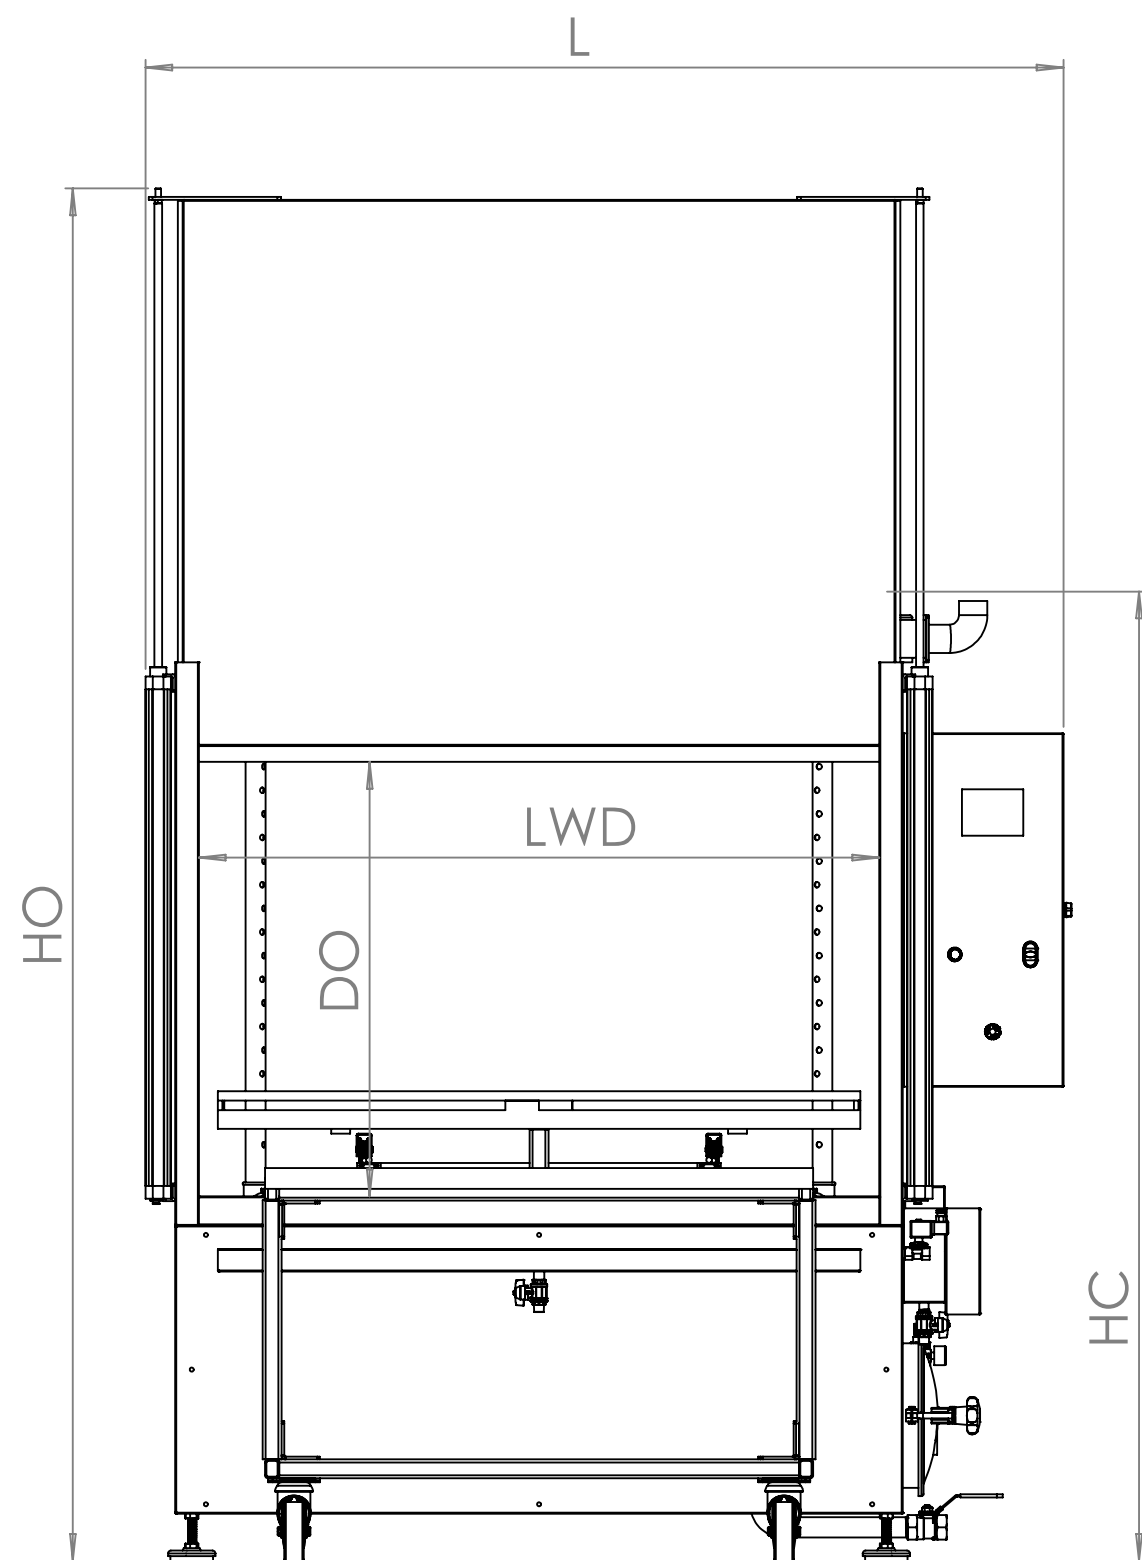

DIMENSIONS AND LAYOUT		F1200	F1400	F1600	F1800	F2000
L	Length	177 CM	197 CM	217 CM	237 CM	257 CM
PV	Depth	140 CM	160 CM	180 CM	200 CM	220 CM
PA	Depth with loading car	276 CM	316 CM	356 CM	396 CM	436 CM
HO	Opened height	290 CM	290 CM	290 CM	320 CM	320 CM
HC	Closed height	213 CM	213 CM	213 CM	228 CM	228 CM
LWD	Loading widthness	124 CM	144 CM	164 CM	184 CM	204 CM
DO	Door opening height	94 CM	94 CM	94 CM	110 CM	110 CM
DL	Basket diameter	116 CM	136 CM	156 CM	176 CM	196 CM
HL	Loading height	75 CM	75 CM	75 CM	90 CM	90 CM
TK	Tank capacity	250 LT	350 LT	470 LT	610 LT	770 LT
BM	Basket motor	0.18 KW	0.37 KW	0.37 KW	0.37 KW	0.5 KW
WP	Washing pump	1x 1.2 HP (0.9 KW) - 21 ton/h	2x 1.2 HP (0.9 KW) - 21 ton/h		3x 1.2 HP (0.9 KW) - 21 ton/h	
EF	Exhaust Fan	230V 2400RPM 50HZ 0.085 KW			220V 2900RPM 50HZ 0.37 KW	
DS	Disk oil separator	24V - 0.03 KW				
HE	Heating element	2x 7.5 KW			2x 10 KW	2x 10 KW
T	Thermostat	0-80°C				
CC	Carrying capacity	450 KG	500 KG	700 KG	800 KG	900 KG
WT	Working alimention	400V 3HP 50HZ				
AA	Air alimentation	6 - 8 Bar				
W	Weight	- KG	- KG	- KG	- KG	- KG
RU	Noise LT	- dBA	- dBA	- dBA	- dBA	- dBA